



INTRO

MIMETE's plant has been specifically designed to serve the additive market. A VIGA (vacuum induction melting inert gas atomization) ensures high purity and spherical powders. Moreover, thanks to tailored post-processing facilities and a fully equipped in-house laboratory, MIMETE is able to guarantee to its customers the highest quality standards and full process control. Every step of the process is conducted under inert gas and it is fully monitored and traced through the latest software application.

Through co-design solutions, we stand out from the others: by working in close relationship with customers, we achieve a level of understanding of the final application. This process enables us to develop the perfect combination of properties and therefore to produce the most performing metal powder available on the market.

This datasheet describes standard product and properties guaranteed on powder available on stock, it might be considered just a mere guide to introduce you to what MIMETE can offer. Customization is our expertise.

STANDARD PRODUCT INFO

all features can be customized


PRODUCT	VENUS 718 UNS N07718 according to ASTM F3055 Nickel-chromium alloy characterized by oxidation and corrosion resistance, excellent mechanical properties also at high temperature.
PRODUCTION PROCESS	Vacuum inert gas atomization
PARTICLE SHAPE	Spherical
PACKAGING	10 kg plastic sealed bottle with silica bag

CHEMICAL SPECIFICATION

Al	B	C	Co	Cr	Cu	Fe	Mn	Mo	Ni	P	S	Si	Ti	Nb+Ta	Reference Standard
0,20 ÷ 0,80	≤0,006	≤0,08	≤1,0	17,0 ÷ 21,0	≤0,3	bal	≤0,35	2,80 ÷ 3,30	50,00 ÷ 55,00	≤0,015	≤0,015	≤0,35	0,65 ÷ 1,15	4,75 ÷ 5,50	ASTM F3055


PSD

Typical SLM: 15 ÷ 45 µm

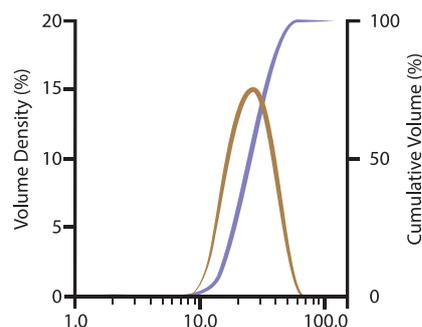

Depending on your specific requirements, MIMETE can provide any particle size.

TECHNOLOGICAL PROPERTIES

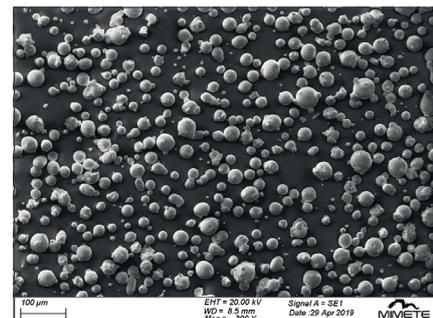

Flowability (Hall Flowmeter): ≤ 30 "

Apparent Density: 3,5 – 4,5 g/cm³



MARS

MIMETE Grade	Al	C	Co	Cr	Cu	Fe	Mn	Mo	Ni	Si	Ti	V	Nb+Ta	Reference Standard
MARS 17-4 PH		≤ 0,07		16,25	4,00	bal	≤ 1,00		4,00	≤ 1,00			0,30	ASTM A564
MARS 316L		≤ 0,03		17,00		bal	≤ 2,00	2,50	12,00	≤ 1,00				ASTM F3184
MARS M300	0,10	≤ 0,03	9,00			bal	≤ 0,10	4,90	18,00	≤ 0,10	0,80			ASTM A579
MARS H13		0,40		5,10		bal	0,40	1,45		1,00		1,00		ASTM A681

OTHER STAINLESS STEEL ALLOYS AVAILABLE LIKE **AISI 415** (1.4313), **AISI 431** (1.4057), **AISI 420** (1.4034), **A182 F51** (UNS S31803), **A182 F53** (UNS S32750)



VENUS

MIMETE Grade	Al	C	Co	Cr	Fe	Mo	Nb	Ni	Ti	W	Nb+Ta	Reference Standard
VENUS 718	0,50	≤ 0,08	≤ 1,00	19,00	19,00	3,05		bal	0,90		5,15	ASTM F3055
VENUS 625	≤ 0,40	≤ 0,10	≤ 1,00	21,50	≤ 5,00	9,00	3,65	bal	≤ 0,40			ASTM F3056
VENUS X	0,10	1,50	21,80	18,50	9,00			bal		0,60		ASTM B435



NEPTUNE

MIMETE Grade	C	Co	Cr	Fe	Mn	Mo	Ni	Si	W	Reference Standard
NEPTUNE 75	≤ 0,35	bal	28,50	≤ 0,75		6,00	≤ 0,50	≤ 1,00	≤ 0,20	ASTM F75
NEPTUNE *06	1,15	bal	29,00	≤ 3,00	≤ 0,50	≤ 1,00	≤ 3,00	≤ 2,00	4,50	AMS 5788G

Enhanced powders to achieve higher performances